



IDMAKER®

APEX



Getting started guide
Guide de démarrage
Guía de primeros pasos
Guia de introdução
Guida rapida per l'utilizzo
Inbetriebnahmeanleitung
用☒使用手冊

руководство по началу работы
Podręczna instrukcja obsługi
Gids om te beginnen
Başlangıç Kılavuzu
제품 사용 설명서
安裝手冊

CONTENTS

General Information:	4
Safety Instruction	4
Caution	4
Printer Installation	5
Welcome	5
Printer and Dye Film Environmental Requirements	6
Printer Key Components	7
Installing the Dye Film	8
Connecting the Power Supply	9
Installing the Driver	10
USB Installation	13
Ethernet Installation	15
Advanced	18
Errors	19
Accessing the Driver Settings	20
Printer Front Display Menu Options	22
Additional Useful Information	24
Maintaining Your Printer is Important	24
Caring for Your Printer	24
Cleaning Supplies	24
How to Clean Your Printer	25
Replacing the Cleaning Roller	26
Using the Cleaning Pen	27
Choosing the Correct Dye Film	28
Choosing the Correct Cards	29
Card Size	29
Card Thickness	29
Card Requirements Necessary For Good Quality Prints	29
Printable Area of the Card	29
Using Magnetic Stripe Cards	30
Using Self Adhesive Cards	30

Upgrading to Duo Operation..... 30
General Data Protection Regulation (GDPR)..... 30
Printer Error Codes..... 31
FCC Declaration..... 48
CE Declaraton..... 48

ID Card Printer - User Manual

GENERAL INFORMATION:

This document contains proprietary information belonging to Magicard Ltd. and may not be wholly or partially copied, stored in a data retrieval system, or used for any purpose other than that for which it was supplied, without the express written authority of Magicard Ltd. All rights are reserved.

The HoloKote feature is protected by US PATENT No: 5,990,918 and by EUROPEAN PATENT SPECIFICATION EP 0 817 726 B1.

Microsoft and Windows 2000, XP, Vista and Windows 7 and 8 are trademarks of Microsoft Corporation.

Copyright © 2011 Magicard Limited.

Magicard Ltd. shall not be liable for errors contained herein or for incidental consequential damages in connection with the furnishing, performance or use of this material. Magicard Ltd. reserves the right to change the content of this document without prior notification.

SAFETY INSTRUCTIONS:

- To prevent electric shock do not remove covers.
- Do not attempt to service the printer yourself.
- There are no user serviceable parts inside (either printer or dye film). In the event of malfunction, contact your printer/consumable supplier.
- This product is only to be used with the Power Source supplied at point of purchase.
- Take care not to spill any liquid on the printer.
- When handling the printer avoid touching the printer edge of the Thermal Print Head. Any grease and contamination will shorten its life.
- Before transporting the printer, remove dye film & card hoppers and pack the printer in its original packaging to reduce the likelihood of damage in transit. Magicard is not responsible for printers/items inadequately packaged.

If using this printer in Germany:

To provide adequate short-circuit protection and over-current protection for this printer, the building installation must be protected by a 16 amp circuit breaker.


Bei Anschluß des Druckers an die Stromversorgung muß sichergestellt werden, daß die Geräteinstallation mit einem 16 A-Überstromschalter abgesichert ist.

CAUTION

Unapproved changes or modification to the equipment could void the users authority to operate the printer and affect any related warranty claim.

ID Card Printer - User Manual

PRINTER AND DYE FILM ENVIRONMENTAL REQUIREMENTS

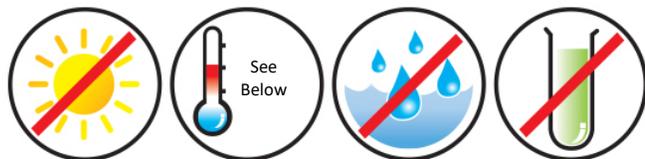


Normal Office Environment With:


- Ambient temperature +10 to 30°C (50 to 86°F).
- Protection from direct sunlight and chemicals.
- Protection from sudden temperature changes.
- Relative humidity 20-70%.
- Sufficient space for:
 - Opening the printer's lid.
 - Cable access at the rear.
- WiFi on this device operates at a frequency of 2.4 GHz. Do not locate the printer in close proximity to devices which could interfere with WiFi operations and connectivity (eg; microwave ovens, direct satellite services, power sources 2.4Ghz phones, wireless or RF video).

ID Card Printer - User Manual

PRINTER KEY COMPONENTS

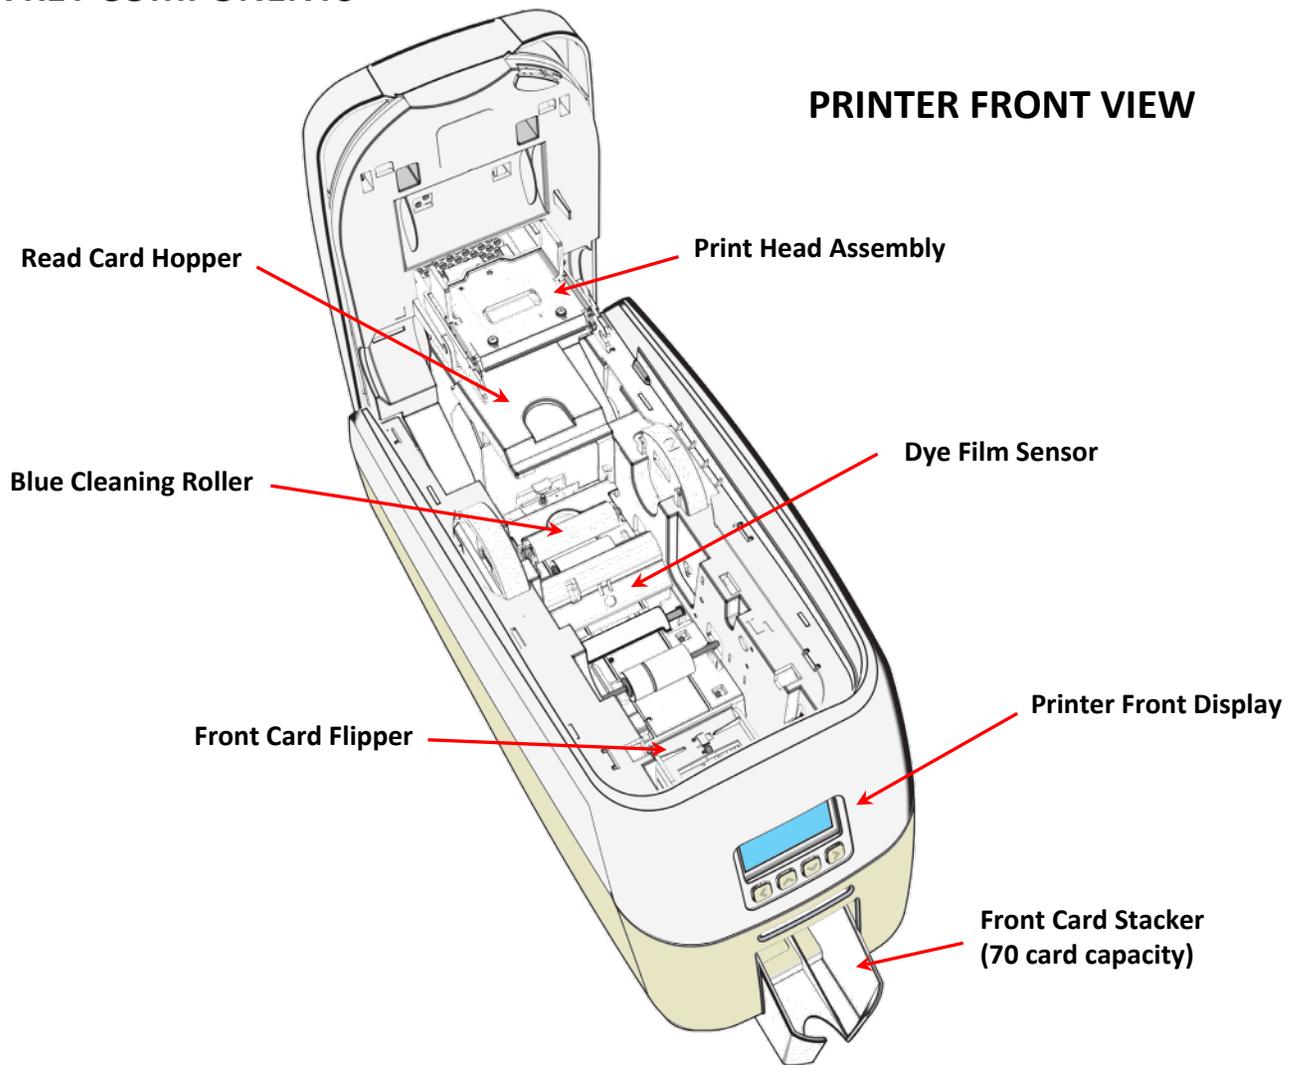


Rear Card Hopper (100 card capacity)

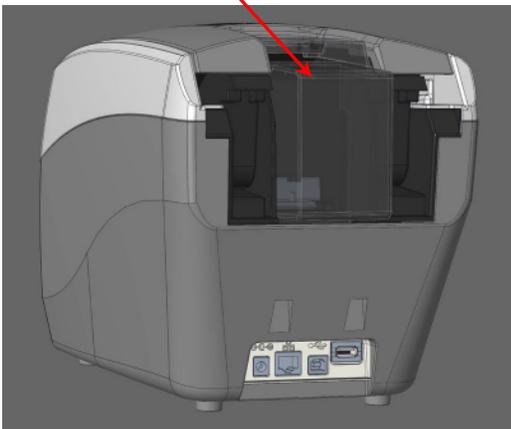

WiFi Dongle


Insert the WiFi dongle plug into the corresponding socket on the rear panel of the printer.

DC Power Ethernet USB WiFi (only)

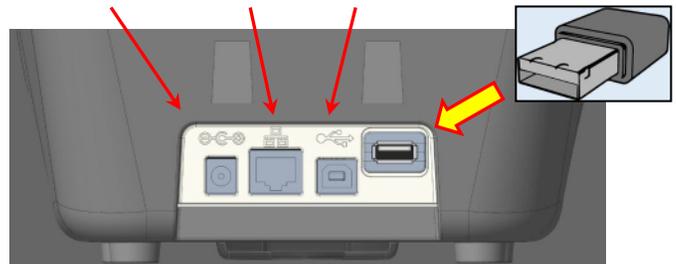


INSTALLING THE DYE FILM

Open the printer's lid and insert the dye film as shown in the diagram below. If the printer's lid is closed (with the printer powered on and the dye film fitted), the printer will begin to initialise. As part of this process, the printer will read an identification tag in the film which contains information about the film type and capacity.

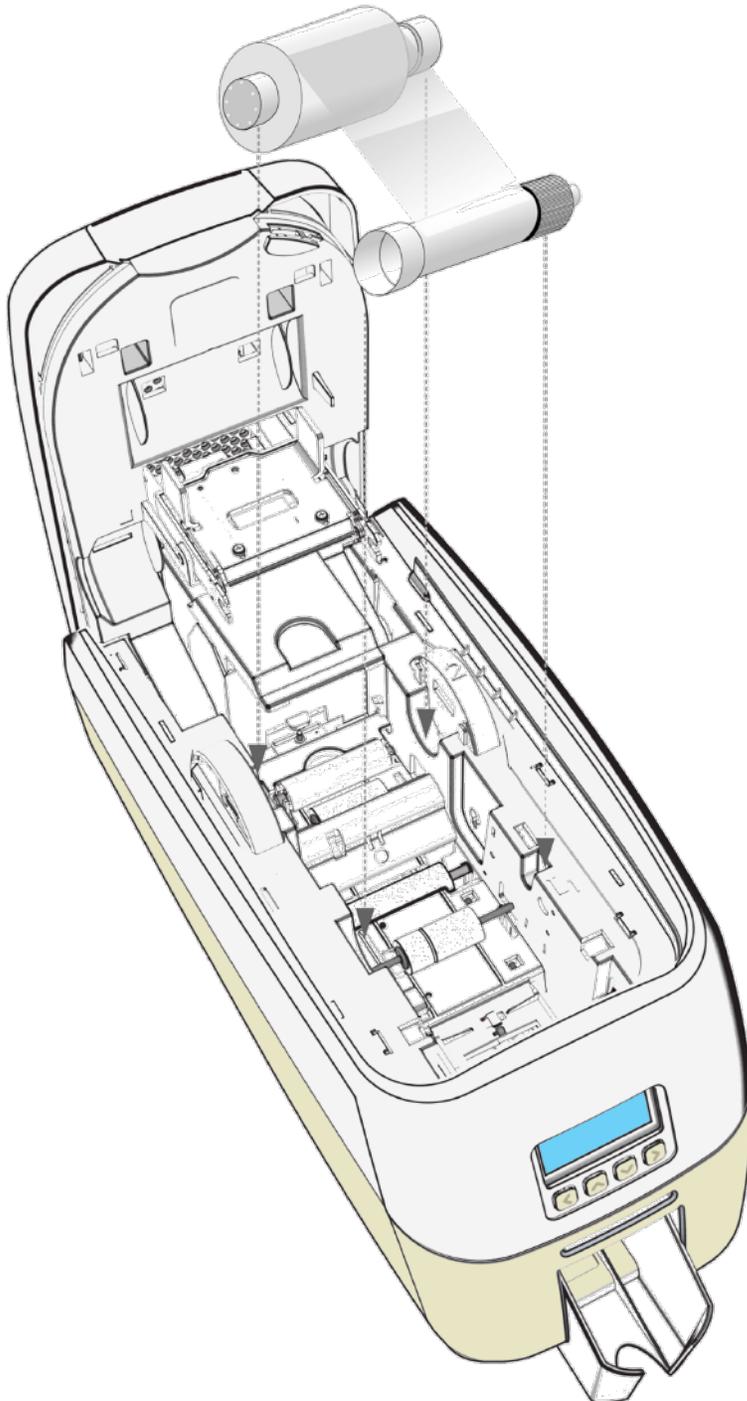

CONNECTING THE POWER SUPPLY

Connect power supply lead as shown below but do not connect the USB lead at the stage (the USB is connected after the driver and successfully been installed).

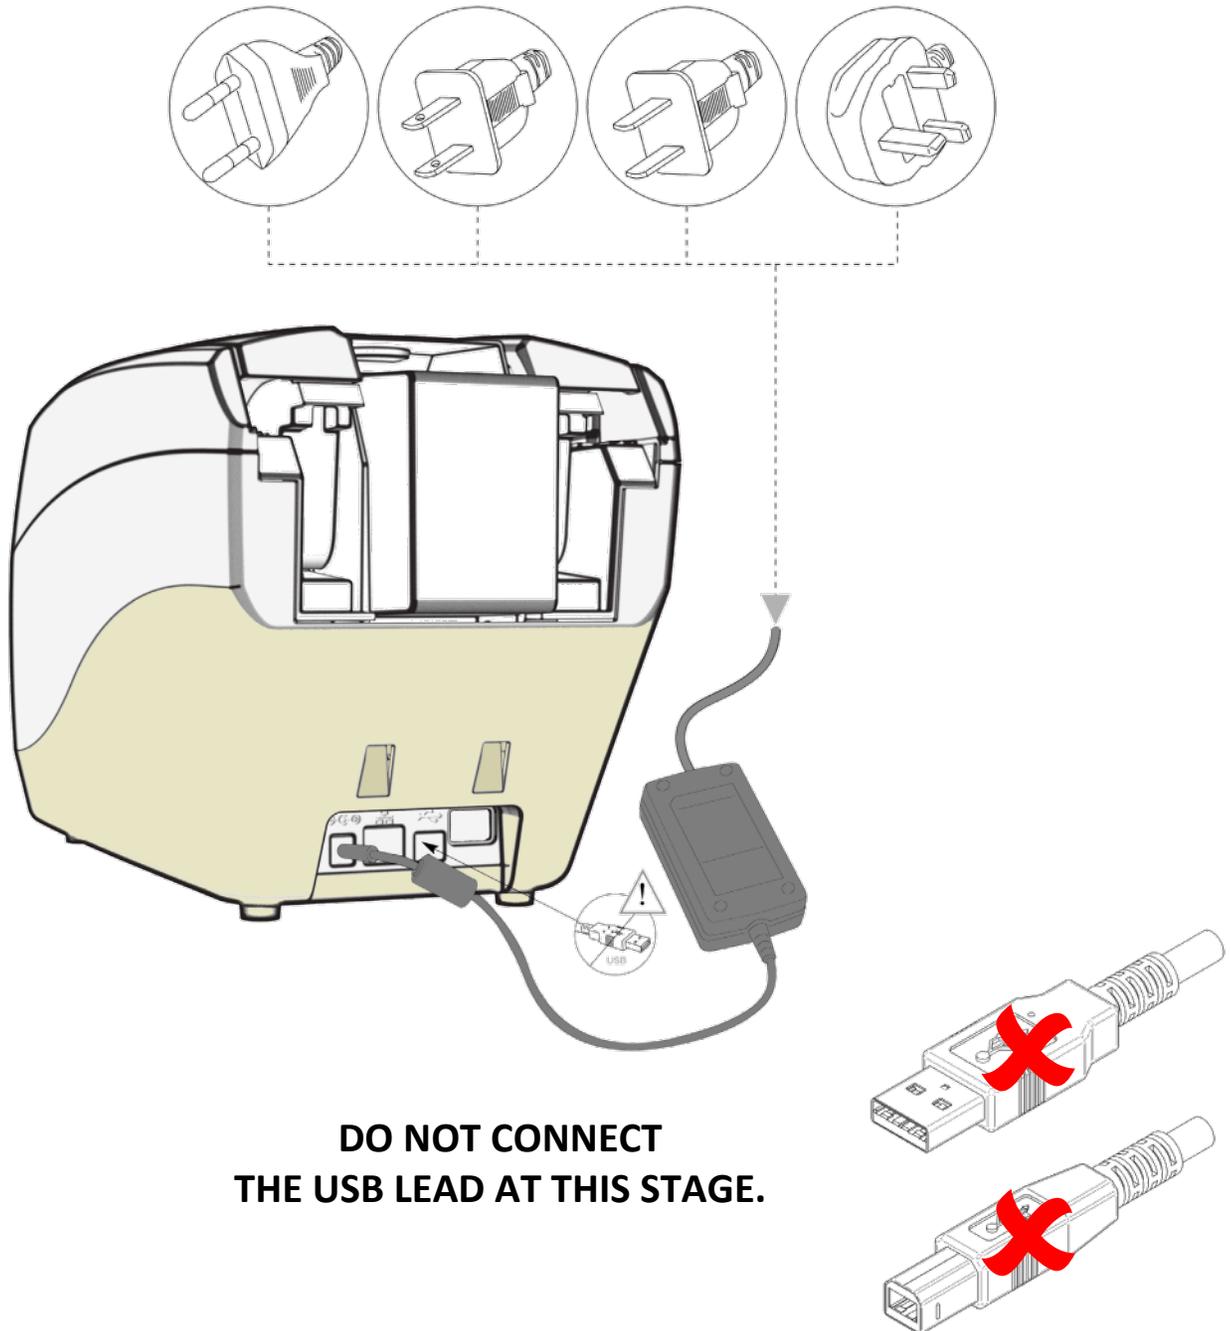

**DO NOT CONNECT
THE USB LEAD AT THIS STAGE.**

INSTALLING THE DRIVER

The latest version of Driver for your 600 printer can be downloaded using the following weblink:
<https://start.magicard.com>.

The Driver installation software will guide you through the installation process. To set up WiFi, the printer must be installed via USB first.

This website provides complete End User support covering:

- Unboxing and setting up your printer.
- Updating the printer's firmware.
- Card Design software.
- The option to Register your printer.




INSTALLER GUIDE


- Click on “setup.exe” icon



- Select the relevant language

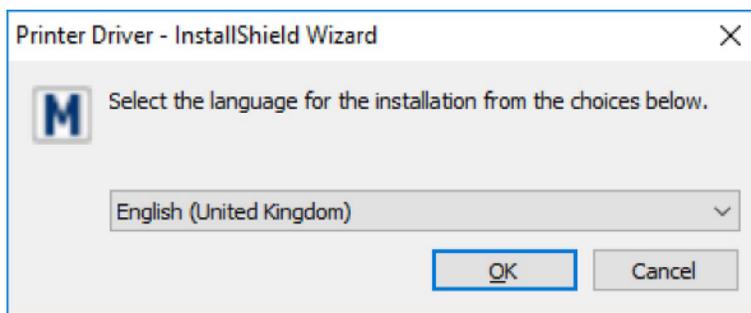


- Wait for the installer to initialize.

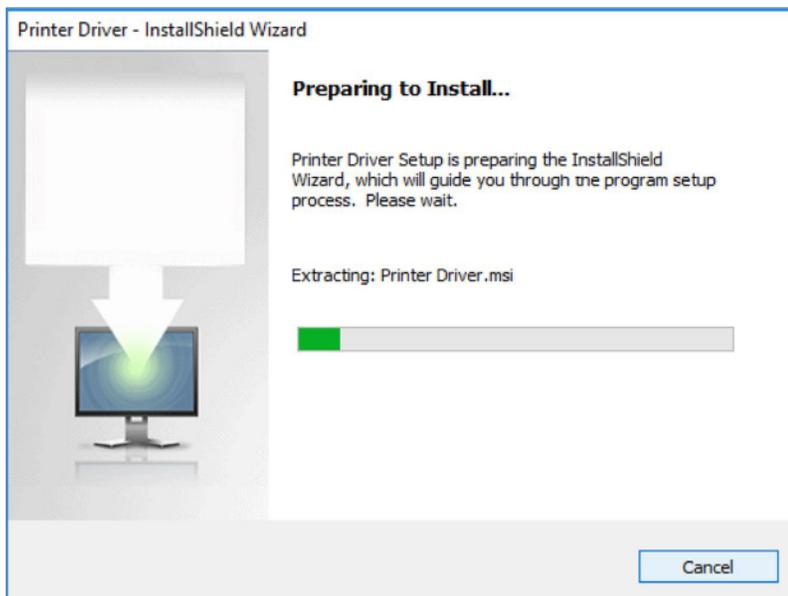


ID Card Printer - User Manual

- Click “install”.

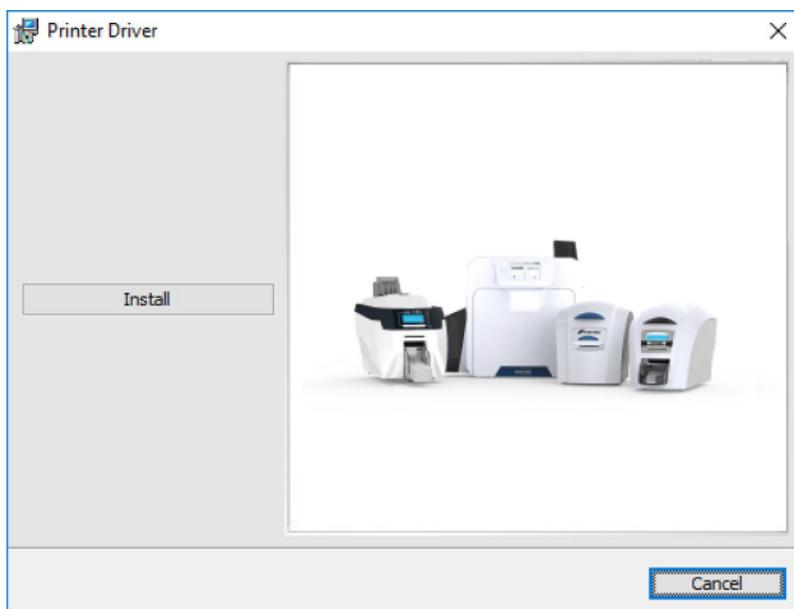


- Select the port type for installation.

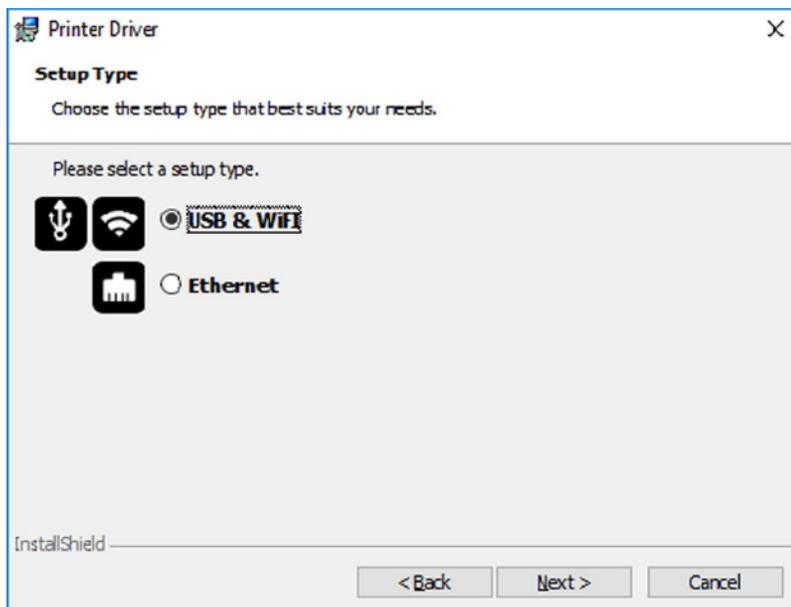


USB INSTALLATION


- Select “USB & WiFi” and click “next”.

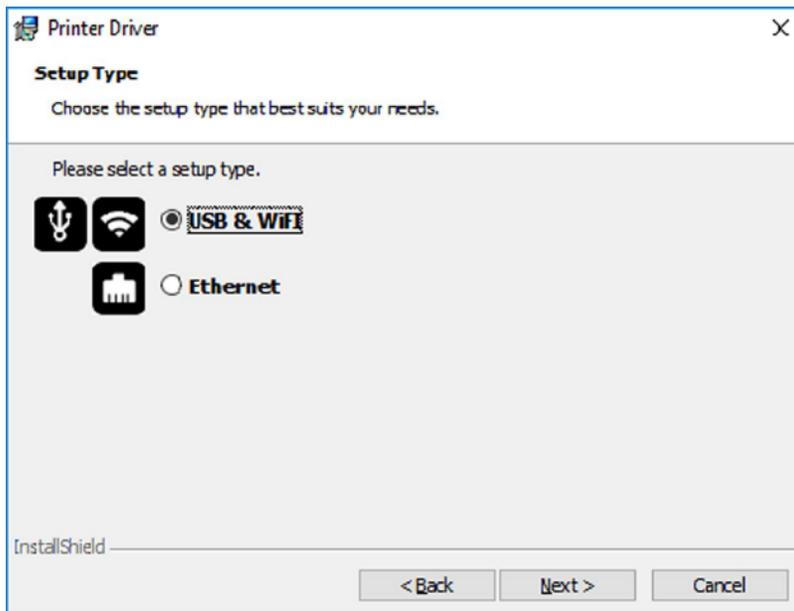


- Agree to license agreement.

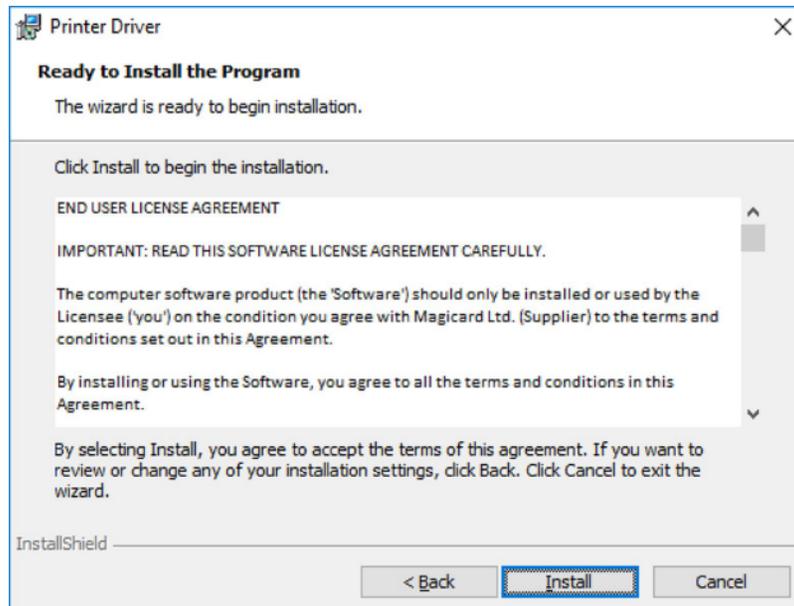


- Wait for the installation progress bar to finish.

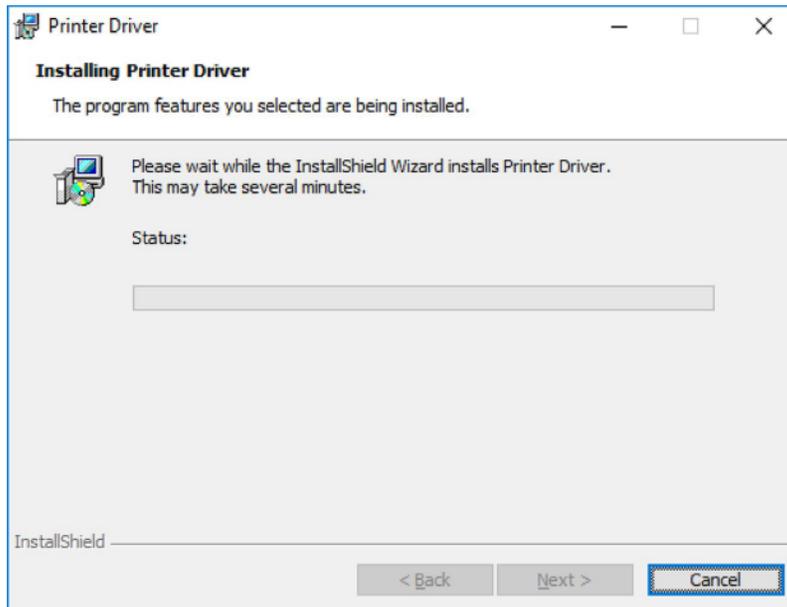

- You will be prompted for a printer to be connected via USB.

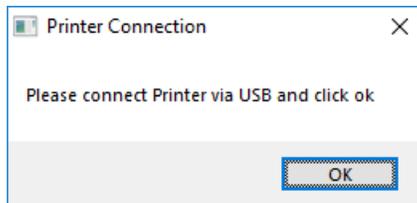

- If no printer is connected, you will be asked to reconnect and retry.

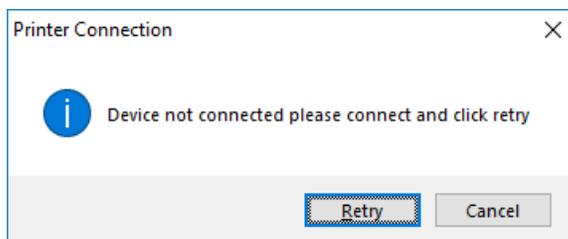

- Wait for the installation progress bar to finish.

NOTE:


If "Cancel" is clicked, you will be asked to confirm this. The installer will then end. The installation will be completed but the printer will not be connected. This will happen when the printer is physically connected via the USB.

NOTE:


Wi-Fi connectivity is not an available option for this printer.

ETHERNET INSTALLATION

- Select “Ethernet” and model.

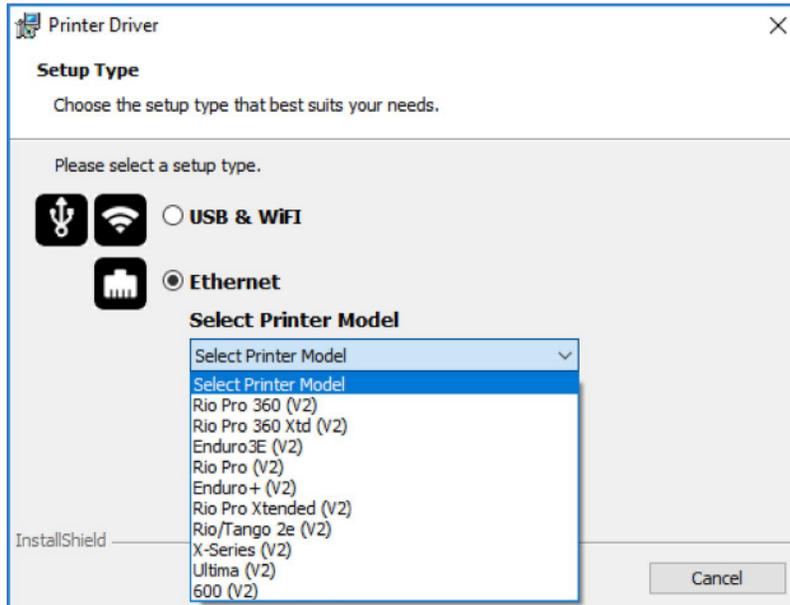


- Enter the IP address of the printer (this can be obtained using the printer’s front panel menu).

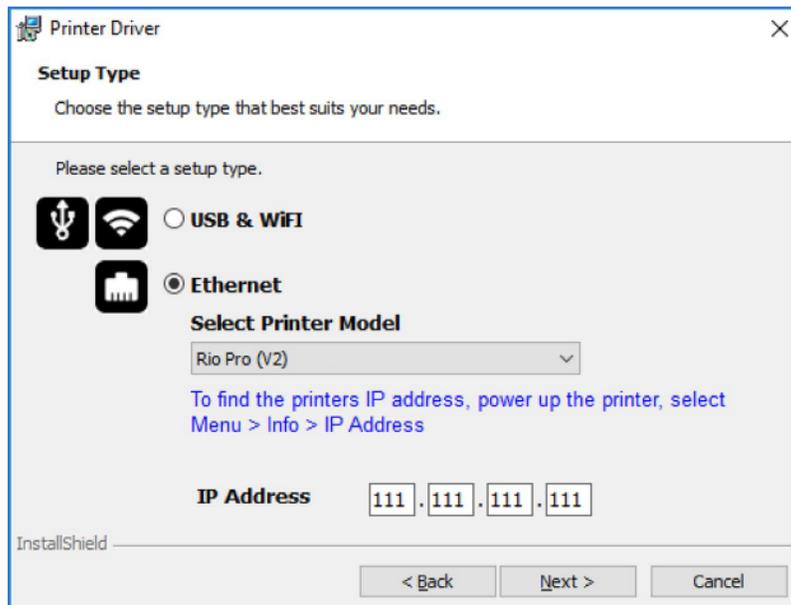


ID Card Printer - User Manual

- Agree to the license agreement.

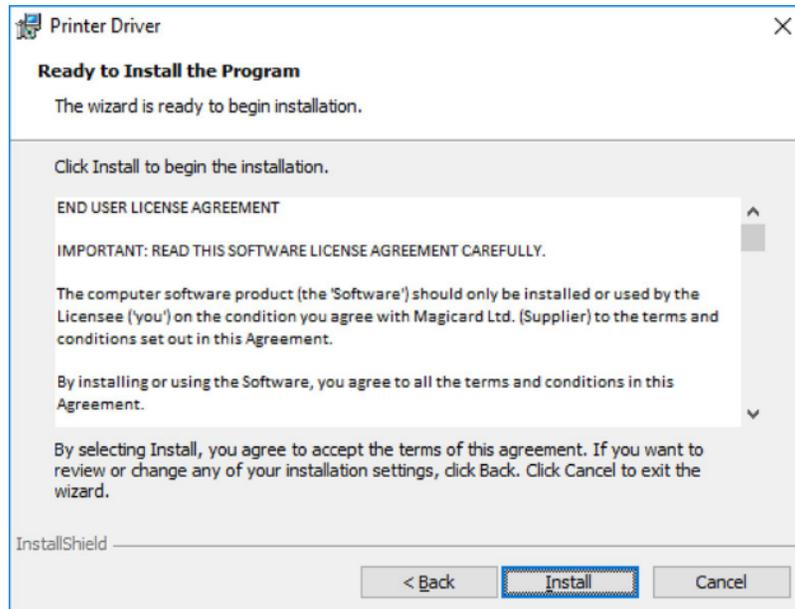


- Wait for the installation progress bar to finish.

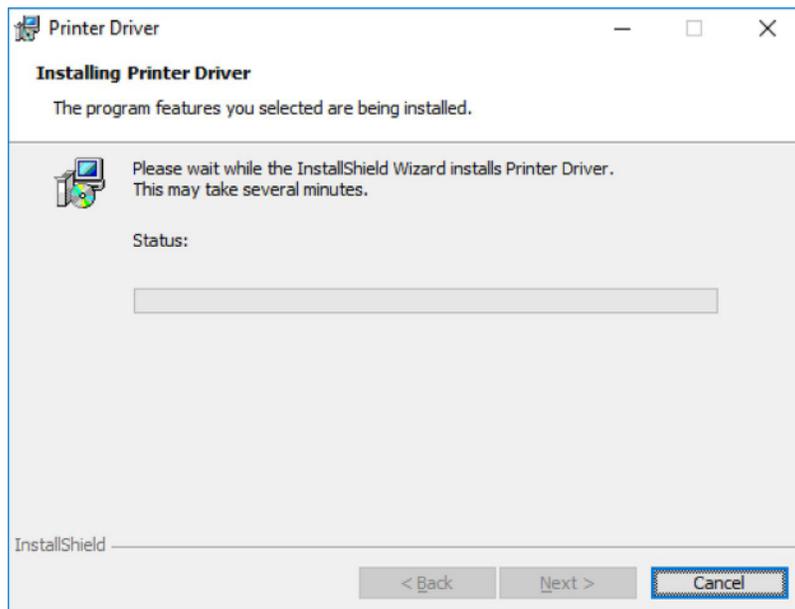

ID Card Printer - User Manual

- After completion of the installation, you will be prompted with the following dialog to signal the installation is complete:

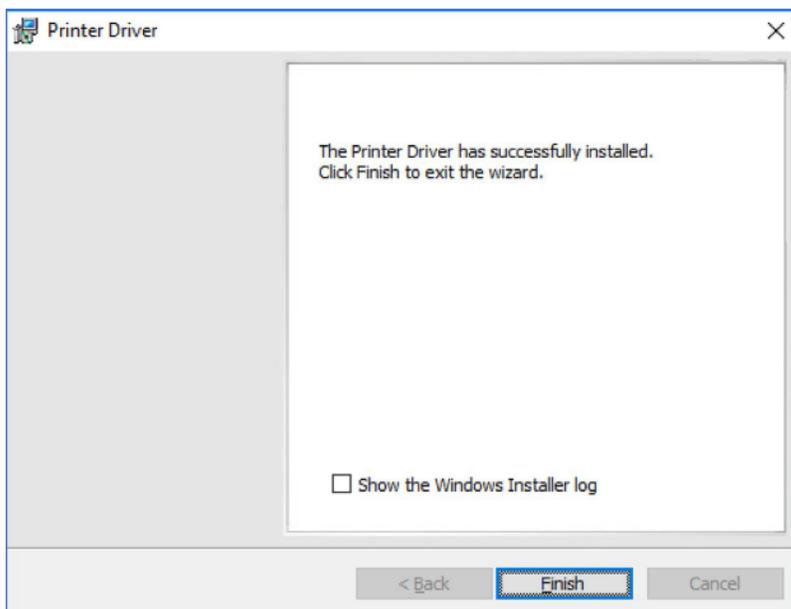

CONGRATULATIONS - The driver installation is now complete! You can now print from your chosen applicaiton.

ADVANCED

The “Advanced” dialog will allow you to perform the following:

- Enable or Disable the WiFi dongle
- Set static addresses
- Connect to hidden networks
- Obtain the MAC address

Current configuration

IP address: Net Mask:

MAC address: Default gateway:

Enable Printer WiFi

Networks

Connected to SSID:

Available networks:

Hidden SSID:

Password:

Use static network settings

Static settings


Static IP address: Static Net Mask:

Primary DNS address: Static default gateway:


Secondary DNS address:

ERRORS

- No WiFi dongle installed in the printer:

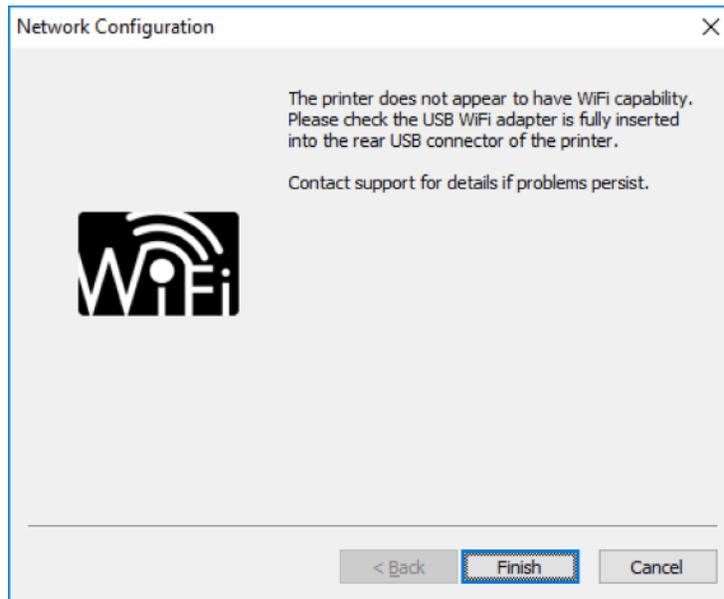


- Incorrect password/unable to connect:

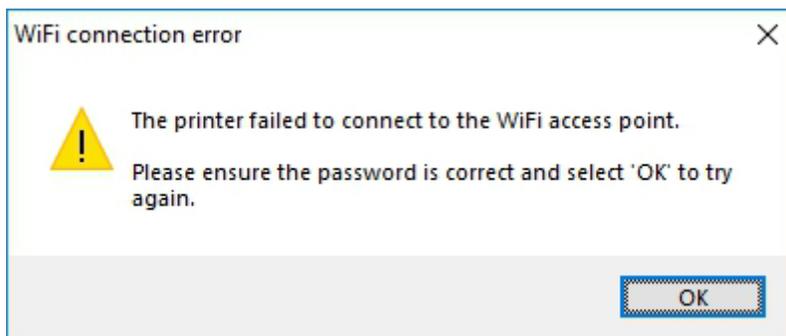


ACCESSING THE DRIVER SETTINGS

Accessing the driver “Printing Preferences” setting (Windows 10 (64bit) shown for information purposes).

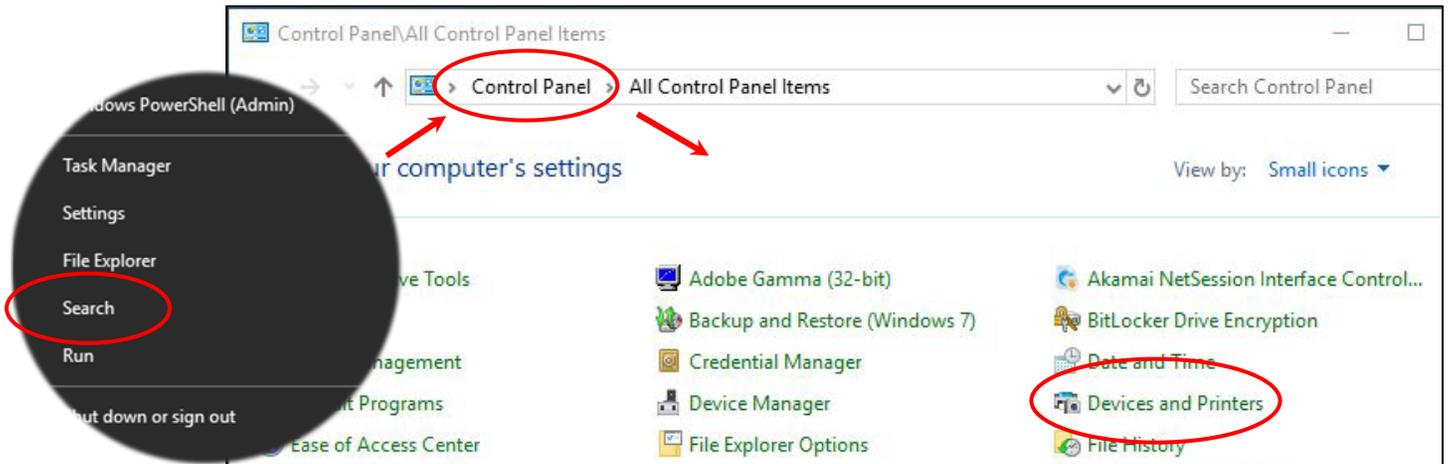

The printer’s driver settings (Printing Preferences) can be accessed as follows:

- Right-click on the “Start” menu icon (bottom left of PC screen) and select the “Search” option.
- Search for “Control Panel” and select the “Devices and Printers” option (you may need to set your “View By:” option to “Small Icons” depending on your PC setup).
- In the “Devices and Printers” window, right-click on the printer thumbnail and select “Printing Preferences”.

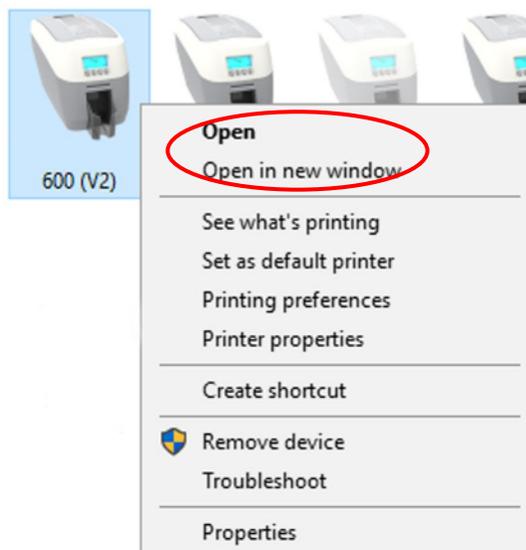

ID Card Printer - User Manual

PRINTING PREFERENCES

DRIVER TABS

PRINTER

This is the default tab and offers the user the option to change card orientation, size and print resolution.

CARD FRONT/BACK

Options to change the color format, image rotation and security layer image.

ENCODING

Available for MAG printers only. Options to change magnetic card setting and encoding formats. ISO and JIS formats supported.

IMAGE


Image manipulation options including color correction, print head power (density) and color adjustment. Color profiles also supported.

ADVANCED

Re-writeable card support including the option for user defined areas on card.

SAVE

Specific user settings can be saved and restored at a later date. Factory restore option available.

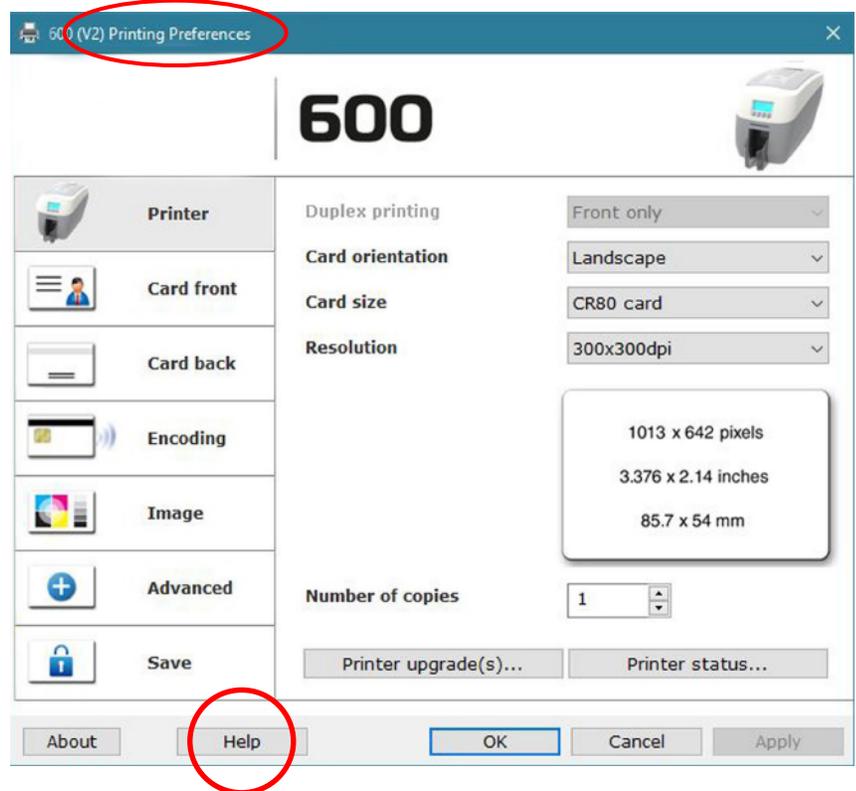

HELP WITH DRIVER SETTINGS


The Printer Driver contains a built-in help file (in HTML format) this file gives an excellent, clear explanation of each driver setting.

To view the driver's help file, go to "Printing Preferences" (as described above), and click on the "Help" button.

PRINTER FRONT DISPLAY MENU OPTIONS


Press the "Menu" button...

The first menu option will be displayed. Press the ">" button (where indicated) to step through each option in the menu. The front display panel consists of a text display and four push buttons. The function of each button will depend on the text displayed immediately above that button.

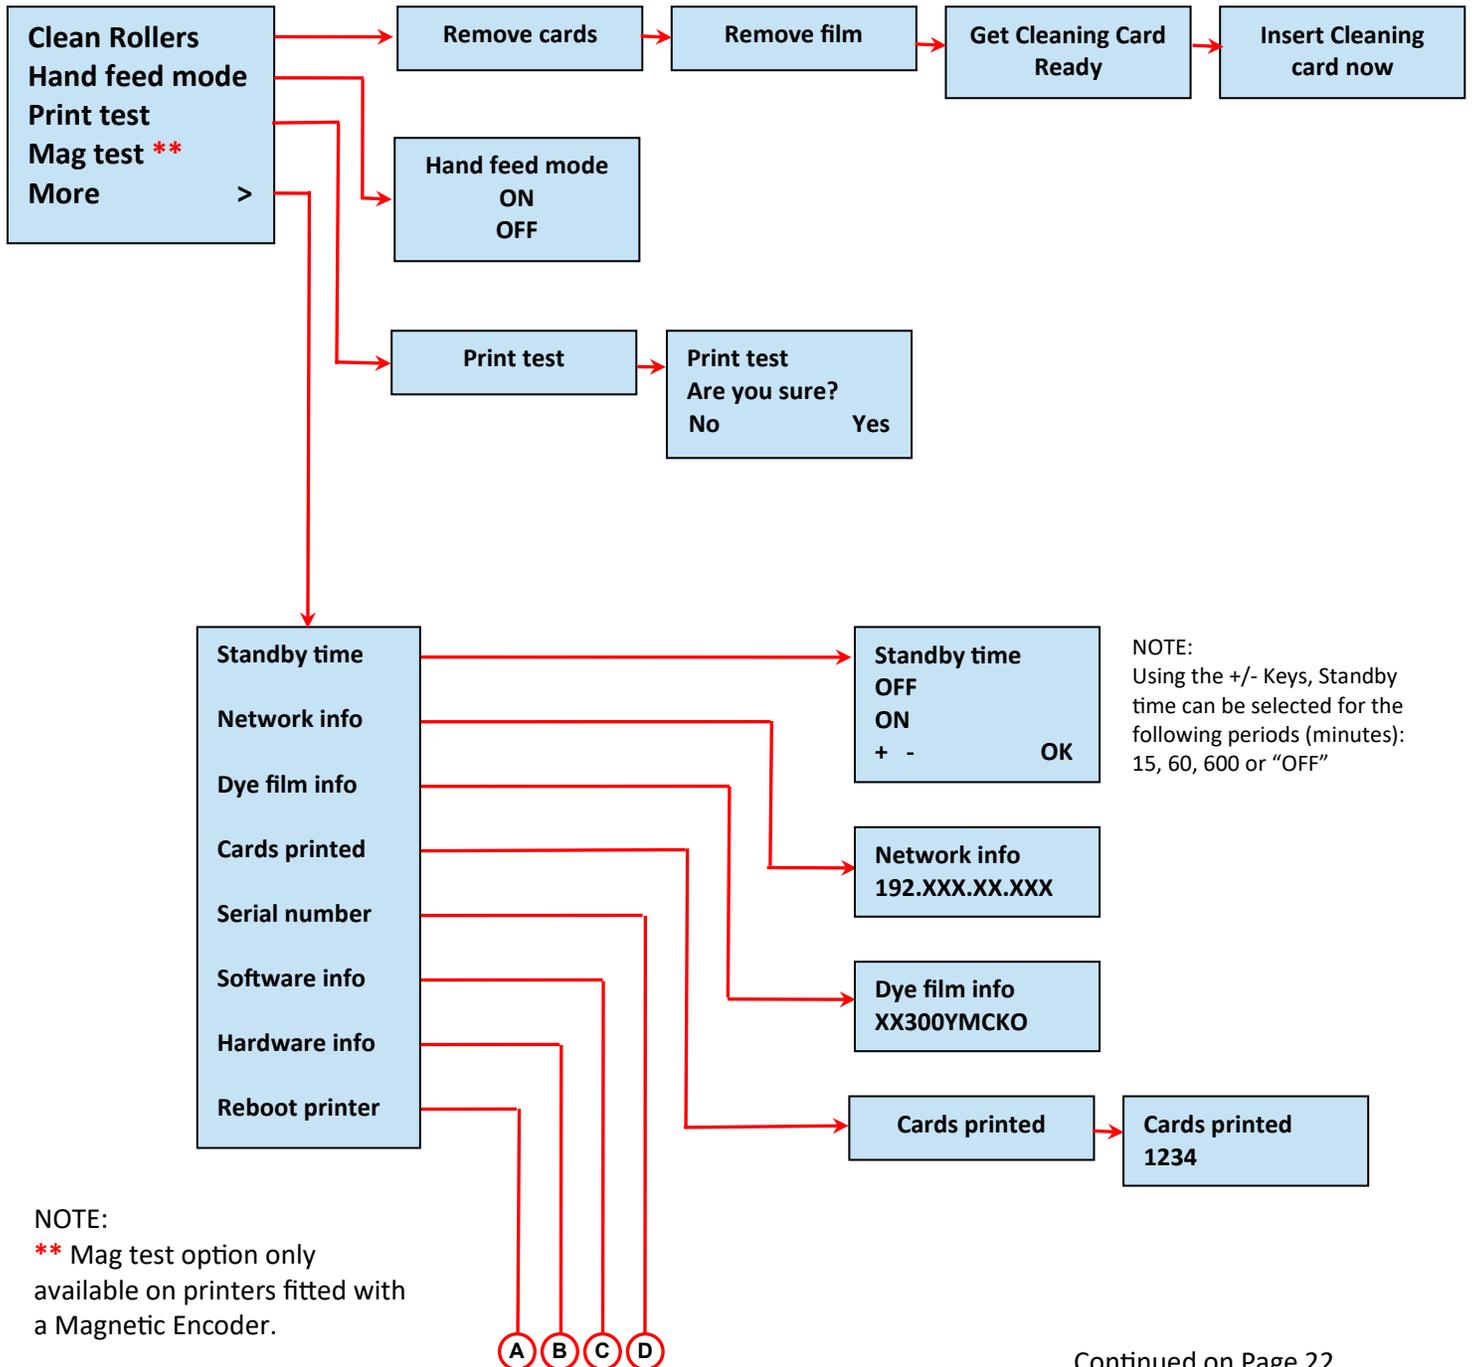

Continued on Page 22.


ID Card Printer - User Manual

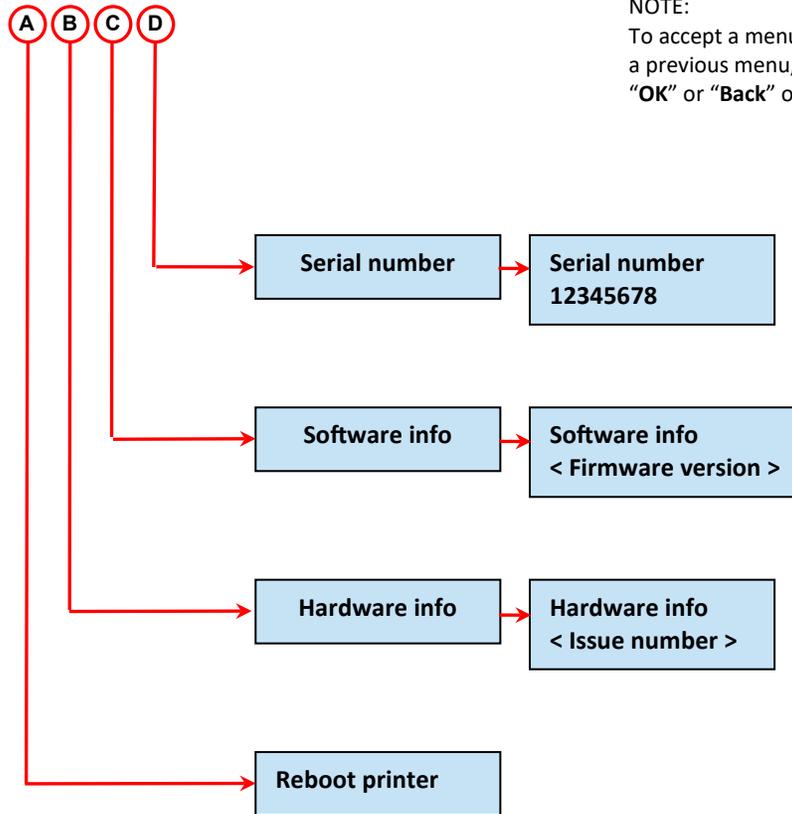

NOTE:
To accept a menu option or return to a previous menu, press the displayed "OK" or "Back" options respectively.

600 Printer Front Panel Layout

NOTE:
To accept a menu option or return to a previous menu, press the displayed "OK" or "Back" options respectively.

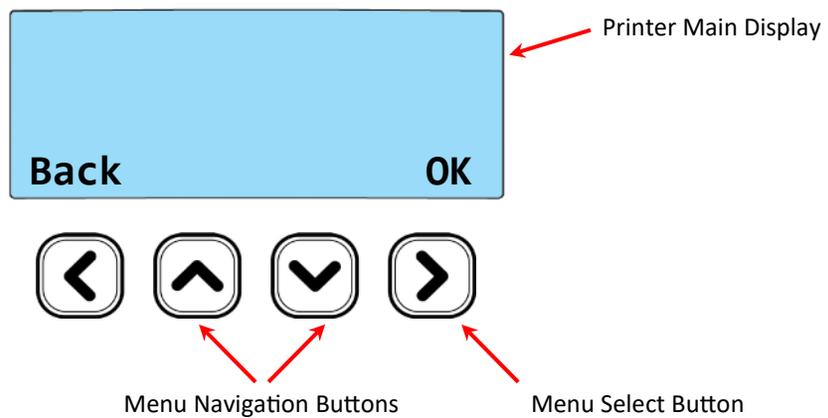

ADDITIONAL USEFUL INFORMATION

CARING FOR YOUR PRINTER:

MAINTAINING YOUR PRINTER IS IMPORTANT!

- Maintenance is an important factor of your printer's good option and longevity.
- Maintaining a regular cleaning routine will give you optimum print quality and prevent down time. We recommend that you clean the printer's rollers and print head each time you change dye films
- A clean printer will produce superior quality ID cards and is less likely to require factory maintenance and/or repair.
- In normal environments, regular maintenance should improve the longevity of the print head itself. (Remember... foreign particles can lodge under the head and cause permanent damage!)
- Increased reliability when magnetic encoding ensuring the encoded data can be read accurately, reliably and continuously.

CLEANING SUPPLIES



Cleaning Kit
Item #


Cleaning Rollers
Item #



How to Clean your Printer

To clean your printer, simply press the “Menu” button and follow the on-screen instructions (also shown below).

Use the right-most button () to progress the options below.

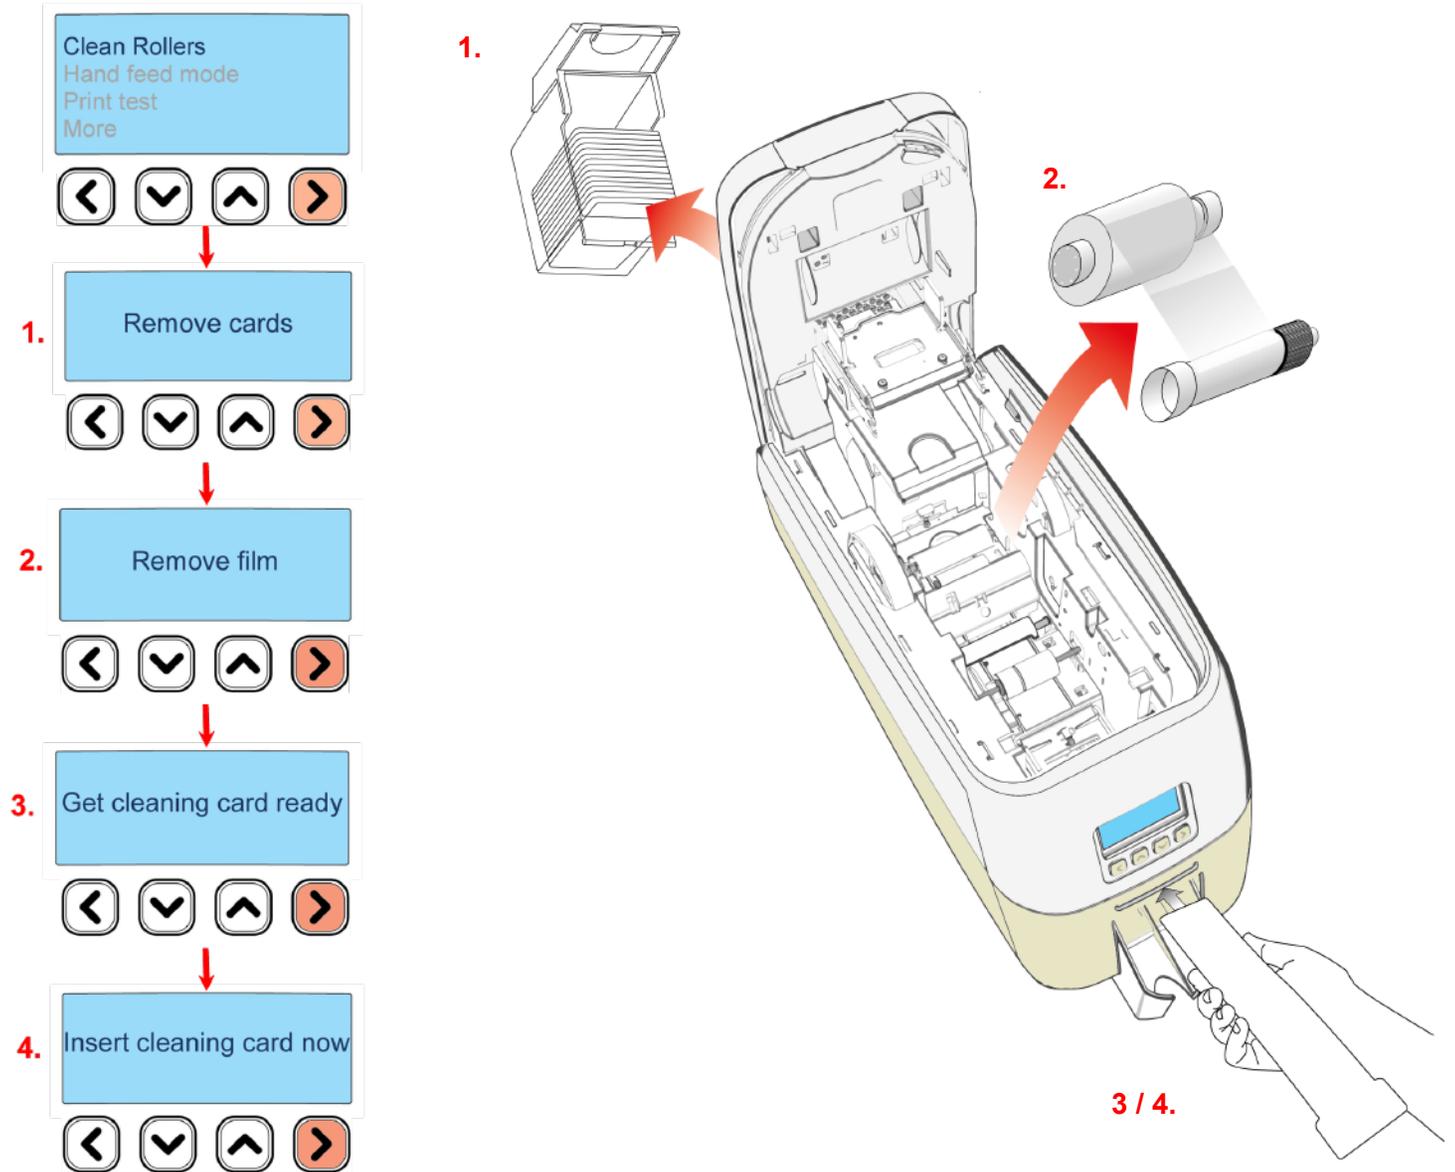

The diagram illustrates the cleaning process in four steps:


- 1.** Remove cards: The card tray is shown being lifted out of the printer.
- 2.** Remove film: A roll of film is shown being unspooled from the printer's internal rollers.
- 3.** Get cleaning card ready: A hand is shown holding a cleaning card, preparing it for insertion.
- 3 / 4.** Insert cleaning card now: The cleaning card is shown being inserted into the printer's card slot.

You can also view a short video on the recommended way to clean your printer using the link to our website below:

<https://support.magicard.com/solutions/cleaning-the-magicard-600-video/>

REPLACING THE CLEANING ROLLER

- Remove the blue cleaning roller from the printer and then remove the protective paper cover.
- Refit the blue cleaning roller (with the sticky coating now exposed) back into the printer.
- Do not touch the blue roller after the protective cover is removed.

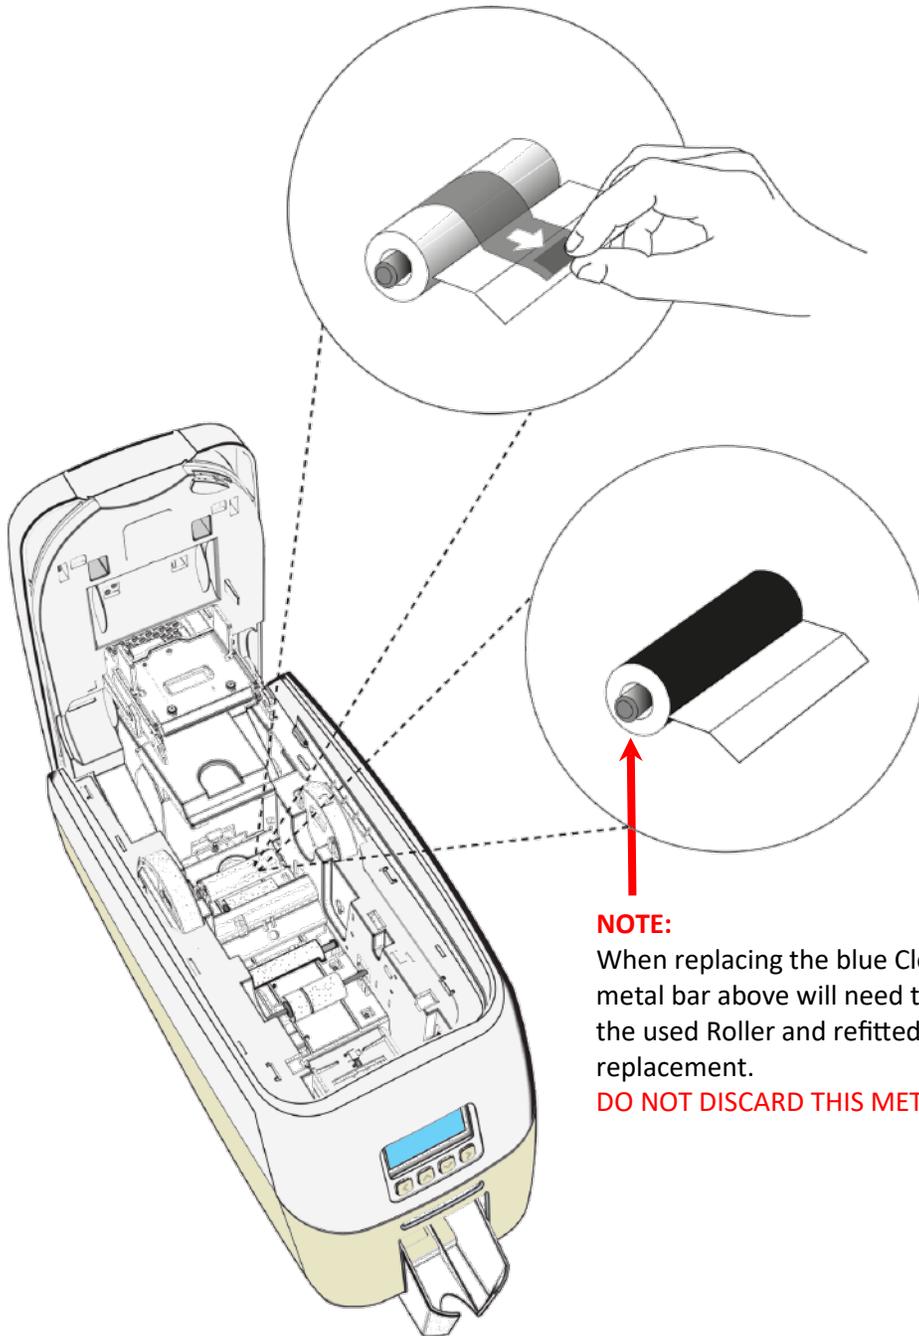

NOTE:


When replacing the blue Cleaning Roller, the metal bar above will need to be removed from the used Roller and refitted to the replacement.

DO NOT DISCARD THIS METAL ROLLER BAR!

USING THE CLEANING PEN

The cleaning pen (supplied with the cleaning kit) is used to clean the face of the print head. The contains isopropyl alcohol (IPA) and is very effective at removing light grease (such as finger prints) which would otherwise spoil a printed card. to use, simply run the tip of the pen across the print face several times as shown in the diagram below.

Once clean, do not touch the print face!

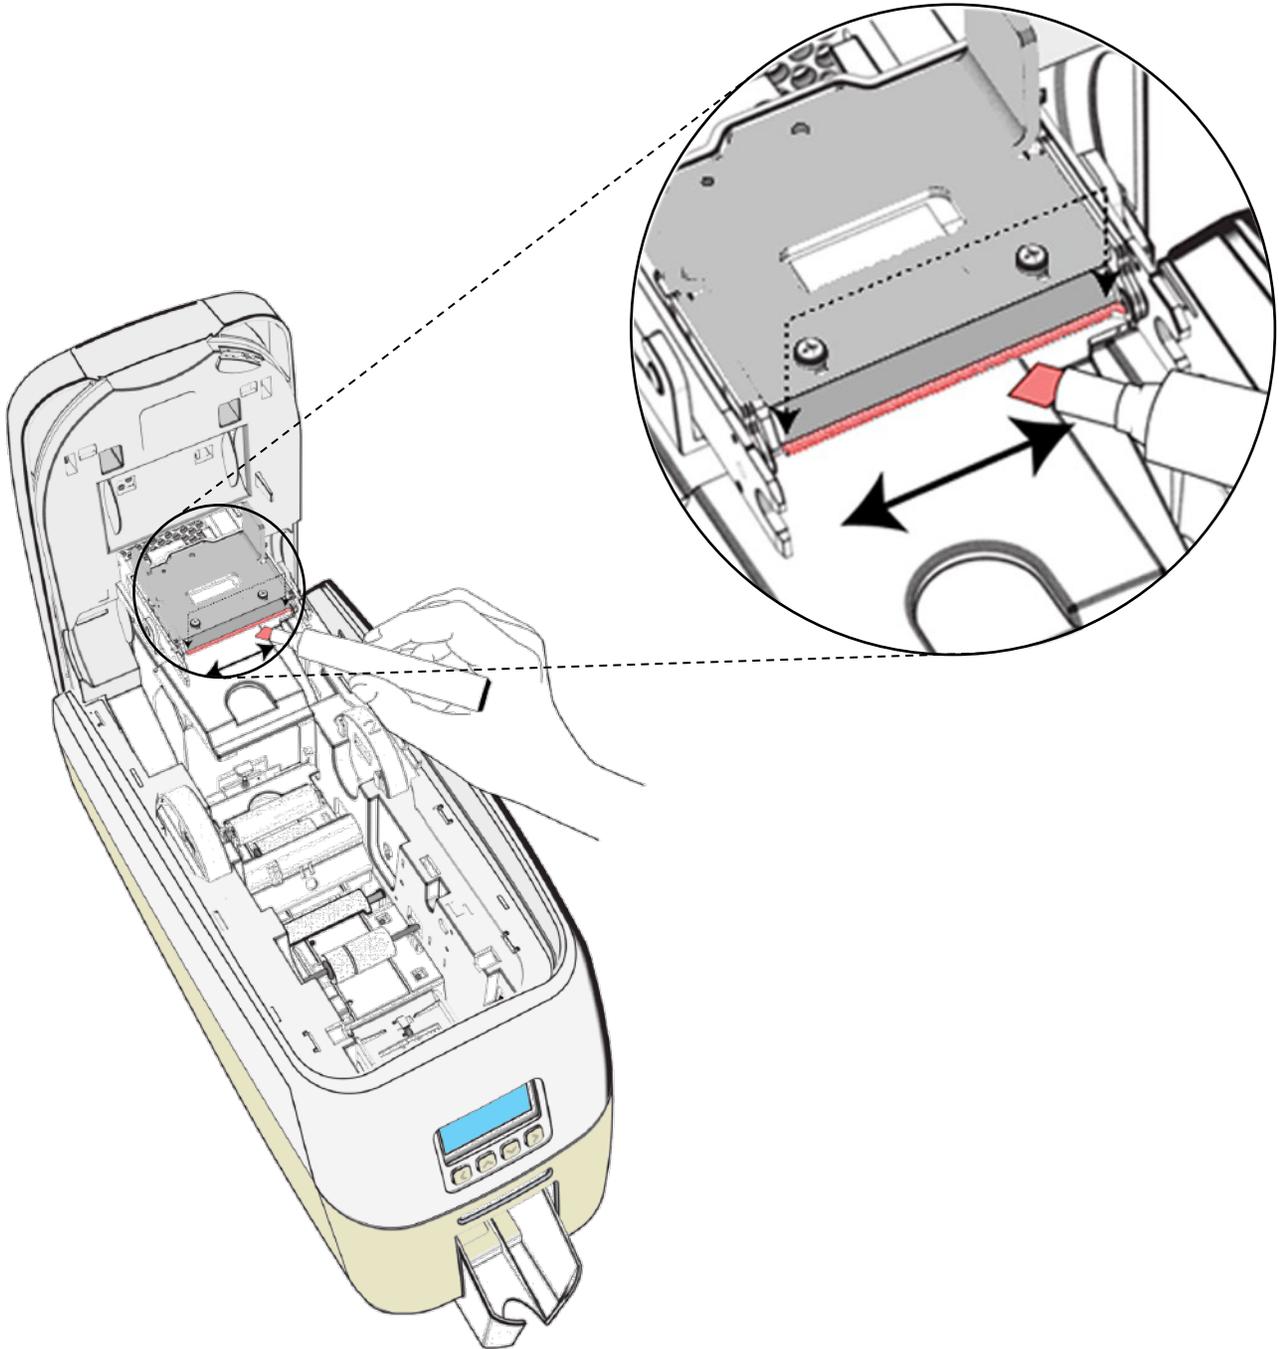

ID Card Printer - User Manual

CHOOSING THE CORRECT DYE FILM

Below is a general guide to selecting the most suitable film for any typical application. "Scratch" film lays down a soft film on the cards surface which can easily be removed by a light scraping.

Dye Film Part Number	Film Panel Layout	Print Capacity (Cards)	Typical Images
MB300YMCKO/2,3	YMCKO	300 (Printing colour one side only).	<p>Single Sided Colour Side 1 only</p> <p>Duplex Colour Side 1 & 2</p>
MB1000K-n (n = colour)	K	1000 (Printing on one side only).	<p>Single Sided Monochrome Black Red Blue Green Silver Gold White Scratch</p>
MB600KO	KO	600 (Printing on one side only).	<p>Single Sided Black + Overcoat</p>
MB250YMCKOK/2,3	YMCKOK	250 (Printing on both sides of card).	<p>Duplex Printing on 2 Sides.</p>

Film Panel Key:	Yellow (Y)	Magenta (M)	Cyan (C)	Resin (K) black	Overcoat (O) clear
-----------------	-------------------	--------------------	-----------------	----------------------------	-------------------------------

NOTE:

- 300YMCKO dye film is generally the appropriate choice for color printing with both single and dual sided (duplex) printers.
- 250YMCKOK dye film is generally preferred for duplex models only as this is more economic when printing color on side 1 and monochrome on side 2.
- 1000K and 600KO dye films are often used where the cost is an important factor.

CHOOSING THE CORRECT CARDS

Not all white PVC cards are the same. For best image quality always use high grade PVC card.

Pure PVC card stock or laminated PVC/Polyester card are available. The latter are more durable and better suited to heavy use and heat lamination when required. For access control and smart card application, use the appropriate type for “direct to card” printing. For consistent results, stick to a single variety of good quality cards.

Card size

CR80 (Standard) = 3.375” x 2.125” (86.5 mm x 53.98 mm). (w x h)

Card thickness

Standard – 0.030” (0.76 mm).
Maximum – 0.063” (1.25 mm).




Card requirements necessary for good quality prints

- Glossy white.
- Free from contamination.
- Free from surface irregularities.
- Free from burrs at Card edges.

Printable area of the Card

The printable area of a standard CR80 Card is size of 1013 x 642 pixels to obtain “over the edge” print quality.

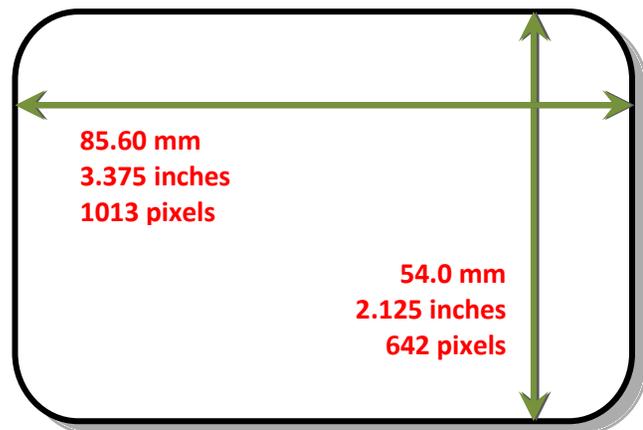

Available Card Types:

M9006-793	Premium blank white cards – CR80
M9006-794	Blank white cards with magnetic stripe – CR80
M9007-011	Self-adhesive blank white cards – CR80
M3610-054	Self-adhesive blank white cards – CR80 (USA)
M9006-796	HoloPatch® blank white cards with gold seal – CR80
M9006-797	HoloPatch® blank white cards with gold seal and magnetic stripe – CR80
E9323	Blank rewritable cards front & PVC back

USING MAGNETIC STRIPE CARDS

If you have a printer fitted with the optional magnetic encoding module, you can print and encode the data on the rear of the card in one operation. The magnetic encoding module can encode both HiCo and LoCo magnetic stripe card specifications.

When loading magnetic stripe cards, make sure the stripe is facing down on the left side of the printer (as viewed from the front). To encode a magnetic stripe card, please refer to your card printing application although it's also possible directly via the driver interface.

USING SELF-ADHESIVE CARDS

There are many types of self-adhesive cards. Thorough investigation and testing has shown that poor quality or incorrect card types will cause:

- Poor image quality.
- Card feed failures.
- Cutting or snapping dye film.
- Cards jamming during printing.


We recommend only using self-adhesive cards supplied by your ID card supplier.

UPGRADING TO DUO OPERATION

Printers can be supplied in two variants: UNO (single-sided) or DUO (double-sided). Single-sided printers can be upgraded to DUO functionality via an electronic update. This is available from your printer supplier.

GENERAL DATA PROTECTION REGULATION (GDPR)

Digital shredding - once data has been used for the print job, it is fragmented, rendering it irrecoverable, helping to ensure the printer is a repository for your sensitive data.

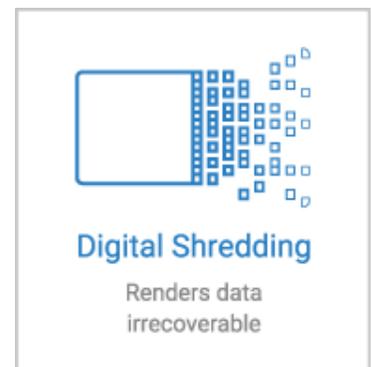

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
1	LID OPEN	1:0	The lid was opened while the print engine was performing an operation.	Close the Lid and try again.
		1:1	The lid was opened at the point the printer was about to begin a print job.	
2	OUT OF CARDS	2:5	While feeding a card from the hopper, it took too long for the rear sensor to block.	Load the printer's rear feed hopper to continue.
		2:6	While trying to feed a card from the hopper, it took too long for the front sensor to block.	
3	HAND FEED ERROR	3:0	While hand feeding a card, it took too long for the front sensor to block.	Check "Hand Feed" mode.
		3:1	While hand feeding a card, it took too long for the hopper sensor to detect a card.	
4	CARD JAM	4:0	While moving the card forwards to the front sensor in preparation for placing it in the contactless encoding position, it took too long for the front sensor to block.	Open the printer's Lid and remove the jammed card to continue.
		4:1	While moving the card backwards from the front sensor to the contactless encoding position, it took too long for the front sensor to unblock.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		4:2	While feeding a card from the smart encoder to the flipper, it took too long for the smart extract sensor to indicate that the card was free of the encoder.	
		4:3	While moving a card from the flipper into the smart encoder, it took too long for the smart insert sensor to trigger.	
		4:4	While moving the card from the flipper to the standby position, it took too long for the mid sensor to block.	
		4:7	While feeding a card from the hopper, and having seen the card reach the rear sensor, it took too long for the mid sensor to block.	
		4:8	While feeding a card from the hopper, and having seen the card reach the mid sensor, it took too long to clear the rear sensor by rewinding the feed motor.	
		4:9	While moving the card forwards to feed into the flipper, it took too long for the card's leading edge to block the front sensor.	
		4:13	While moving the card from the front sensor to the standby position, it took too long for the front sensor to unblock.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		4:14	While moving the card from the rear sensor to the standby position, it took too long for the rear sensor to unblock.	
		4:15	While moving a card from the flipper into the smart encoder, it took too long for the smart extract sensor to trigger. This may mean that there is no encoder actually fitted.	
		4:16	While feeding a card past a sensor, and having seen the card reach that sensor, it took too long to unblock.	
		4:17	While moving the card into position for a printing or encoding operation, it took too long for the reference edge of the card to move in front of the sensor used for positioning. In the case of extended mono prints, this means the mid sensor took too long to block. In other cases, this means it took too long for the rear sensor to unblock.	
		4:18	While moving the card into position for a printing or encoding operation, it took too long for the reference edge of the card to move behind the sensor used for positioning. In the case of extended mono prints, this means the mid-	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
			sensor took too long to unblock. In other cases, this means it took too long for the rear sensor to block.	
		4:19	While trying to eject the card, it took too long for the leading edge of the card to block the front sensor.	
		4:20	While trying to eject the card and having seen the leading edge of the card reach the front sensor, it took too long for the front sensor to unblock.	
		4:21	While moving the card from the flipper to the standby position, and having seen the card reach the mid sensor, it took too long for the mid sensor to unblock.	
		4:22	While trying to feed a card from the hopper, and having seen the card reach the front sensor, it took too long for the front sensor to unblock.	
		4:23	While moving the card backwards to feed into the flipper, it took	
		4:24	While moving the card from the mid sensor to the standby position, it took too long for the mid sensor to unblock.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
5	OUT OF FILM	5:0	While moving a dye panel edge from the dye sensor to the printhead, it took too long for the tachometer wheel to move the required amount. The film has probably either run out or snapped.	Check dye film is fitted and not expired. Also check the Film is not torn.
		5:1	While advancing to the next dye panel, it took too long for the next panel boundary to be detected.	
		5:2	It took too many attempts for the printer to find a particular panel of dye film (possibly because the dye sensor needs calibration).	
		5:3	A valid dye film RFID tag was found, but no physical ribbon could be detected while trying to take up the film slack.	
		5:4	A valid dye film RFID tag was found, but there were no shots remaining.	
		5:5	After printing a card, the printer was unable to decrement the number of remaining prints on the dye film RFID tag.	
		5:6	While advancing the dye film, the printer detected the end-of-film marker.	Check dye film.

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		5:7	While moving the dye film, too great a time elapsed between tacho sensor counts. The film has probably either run out or snapped.	Check dye film.
		5:8	While trying to take up the film slack, no tacho pulses were observed within a reasonable amount of time.	
6	WRONG FILM TYPE	6:0	The fitted dye film had an invalid RFID tag. Either the tag was not programmed correctly or there is a problem with the RFID tag reader.	Try a new dye film.
		6:1	A dye film ribbon was detected, but a valid dye film RFID tag could not be found. This printer is not configured to permit tagless film.	
		6:2	The fitted dye film does not have the right region code for this printer. Try another roll of film.	
		6:3	The fitted dye film does not have the right dealer code for this printer. Try another roll of film.	
		6:4	The fitted dye film does not have the right project code for this printer. Try another roll of film.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		6:5	The fitted dye film does not have the right grade code for this printer. Try another roll of film.	
7	REMOVE FILM	7:0	The printer detected film was loaded when trying to calibrate dye LEDs and dye motor.	
		7:1	The printer detected film was loaded when trying to carry out a soak test.	
		7:2	The printer detected film was loaded when trying to carry out the cleaning routine.	
8	CAM ERROR	8:0	While moving the printhead cam to the closed position, it took too long to detect the trailing edge of the cam pulley flag.	
		8:1	While initialising the cam, it took too long to detect the leading edge of the cam pulley flag.	
		8:2	While initialising the cam and having detected the leading edge of the cam pulley flag, it took too long to detect the trailing edge of the flag.	
		8:3	While moving the printhead cam to the open position, it took too long to detect the leading edge of the cam pulley flag.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
9	FLIP ERROR	9:0	While initialising the flipper, it took too long to detect the start of the blocked region of the flange.	
		9:1	While initialising the flipper and having detected the start of the blocked region of the flange, it took too long to detect the start of the unblocked region (the start of the slot).	
		9:2	While moving the card backwards to feed into the flipper and having seen the card arrive at the mid sensor, it took too long for the mid sensor to unblock.	
10	INVALID FILE	10:0	The printer received a print job. The side number specified for one of the sides of the image data was invalid. This probably means the print job file was corrupt.	
		10:1	The printer received a print job. The format specified for the image payload was not supported. If updating the firmware does not fix this, it may be that the print job file is corrupt.	
		10:2	The printer received a print job containing magnetic track data. One of the tracks specified an invalid track number.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		10:3	The printer received a print job containing magnetic track data. The number of bits specified for one of the tracks was out of range. This probably means that the print job file was corrupt.	
		10:4	The printer received a print job containing magnetic track data. The number of bits specified for one of the tracks was too great for the provided payload size. This probably means that the print job file was corrupt.	
		10:5	The printer received a print job containing magnetic track data. The bit density specified for one of the tracks was out of range. This probably means that the print job file was corrupt.	
		10:6	The printer received a print job. The panel ID specified for one of the panels was invalid. This probably means that the print job file was corrupt.	
		10:7	The printer received a print job. The width or height specified for the card was out of range. This probably means the print job file was corrupt.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		10:8	The printer received a print job. The payload provided was not large enough to hold the image width specified. This probably means the print job file was corrupt.	
		10:9	The printer received a print job. The power adjustment for one of the panels was out of range. This probably means the print job file was corrupt.	
		10:11	The printer received a print job. The number of copies specified was less than 1. This means that the print job file is corrupt.	
		10:12	The printer received a print job containing magnetic track data. The number of encoding attempts requested was less than one.	
		10:13	The printer received a print job containing magnetic track data. The number of verification attempts requested was less than zero.	
		10:14	The printer received a print job. The x adjustment specified for a panel was out of range. This probably means the print job file was corrupt.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		10:15	The printer received a print job. The y adjustment specified for a panel was out of range. This probably means the print job file was corrupt.	
		10:16	The printer received a print job. An area or hole setting for one of the panels was missing a required element. This probably means the print job file was corrupt.	
		10:17	The printer received a print job. An area or hole setting for one of the panels had an out-of-range value. This probably means the print job file was corrupt.	
11	UPGRADE REQUIRED	11:00	The fitted dye film has a data format which the printer could not understand. The printer software needs to be upgraded in order to support this type of dye film.	
12	SENSOR ERROR	12:0	While hand feeding a card, the rear sensor blocked before the front one.	
		12:1	While hand feeding a card, and having seen the card reach the front sensor, the rear sensor blocked before the front sensor unblocked.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		12:3	While feeding a card from the hopper, the front sensor blocked before the mid one.	
		12:4	While feeding a card from the hopper, the front sensor blocked before the rear one.	
		12:5	While trying to feed a card from the hopper, the mid sensor triggered before the front one.	
13	INTERNAL ERROR	13:1	The printhead took too long to reach a temperature suitable for printing. There may be a fault with the printhead temperature sensor.	
		13:2	The mag PCB MCU reported that an error occurred while trying to carry out an operation or interpret a command.	
		13:3	The mag driver reported that an error occurred while trying to carry out an operation.	
		13:4	Communication with the print engine microcontroller failed. If rebooting the printer does not fix this problem, try updating the firmware. If that does not work, there is probably a hardware fault.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		13:5	The print engine microcontroller reported an error. If rebooting the printer does not fix this problem, try updating the firmware. If that does not work, there is probably a hardware fault.	
14	WRONG SD CARD	14:0	The internal SD card did not have a valid signature.	
15	HOLOKOTE INVALID	15:0	While attempting to validate a Holokote file, the printer found that the file was not in the right format. Either it is not the right type of file, or the data has been corrupted.	
16	WRONG HOLOKOTE	16:0	While attempting to validate a Holokote file, the printer found that the file was not licensed for this printer. It is possible that the file was intended for a different printer.	
17	UPGRADE INVALID	17:0	While attempting to validate an upgrade file, the printer found that the file was not in the right format. Either it is not the right type of file, or the data has been corrupted.	
		17:1	As above.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		17:2	While attempting to validate an upgrade file, the printer could not interpret the file's upgrade commands. Either it is not the right type of file, or the data has been corrupted.	
18	WRONG UPGRADE	18:0	While attempting to validate an upgrade file, the printer found that the file was not licensed for this printer. It is possible that the file was intended for a different printer.	
19	SOFTWARE INVALID	19:0	While performing a system software update, the incoming update data was found to have an invalid signature.	
		19:1	While performing a system software update, the incoming update data was not in the correct format.	
20	SD WRITE FAILURE	20:0	While performing a system software update, an error occurred while trying to write temporary update data to the SD card.	
		20:2	While attempting to apply an upgrade, the printer was unable to create the upgrade directory on the SD card. Either the SD card is missing, unformatted or functioning incorrectly.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
		20:3	While attempting to install a custom Holokote image, the printer was unable to create the overcoat directory on the SD card. Either the SD card is missing, unformatted or functioning incorrectly.	
		20:4	While attempting to update the system image, the printer was unable to create the system upgrade directory on the SD card. Either the SD card is missing, unformatted or functioning incorrectly.	
		20:5	While attempting to format the SD card at the start of a soak routine, the formatting process failed.	
21	INSTALL FAILURE	21:0	While performing a system software update, an error was reported by the software update script.	
22	NO DUPLEX	22:0	The printer received a double-sided print job but does not have duplex printing enabled.	
23	NO MAG HEAD	23:0	The printer received a print job which required mag encoding but does not have mag encoding enabled.	This printer does not have a magnetic encoder fitted and is unable to process this file type.
24	NO COLOUR FILM	24:0	The printer received a color print job but does not have color film fitted.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
25	NO OVERCOAT	25:0		
26	MOTOR FAULT	26:0	The print engine MCU reported a dye film motor fault.	
		26:1	The print engine MCU reported a card feed motor fault.	
		26:2	The print engine MCU reported a printhead cam motor fault.	
		26:3	The print engine MCU reported a flip position motor fault while moving the card. Note that this is the flipper motor which drives the card, not the rotation motor.	
		26:4	The print engine MCU reported a flip position motor fault while rotating the flipper. Note that this is the flipper motor which drives the card, not the rotation motor.	
		26:5	The print engine MCU reported a flip rotation motor fault. Note that this is the flipper motor which rotates the flipper, not the one which drives the card	
		26:6	The print engine MCU reported a main card drive motor fault.	
27	CLEAN REQUIRED	27:0	On start-up, the printer detected that it was overdue for cleaning.	

ID Card Printer - User Manual

	ERROR TEXT DISPLAYED ON PRINTER		ERROR DESCRIPTION	SOLUTION BY CATEGORY
28	PRINthead ERROR	28:0	The printhead does not seem to be fitted.	
29	SD CARD MISSING	29:0	The internal SD card could not be detected.	
30	MAG VERIFY FAIL	30:0	While attempting to verify mag data after an encoding operation, the printer found that the data read back from the mag stripe did not match the data written.	
31	COLOUR DISABLED	31:0	The printer received a color print job but does not have color printing enabled.	

ID Card Printer - User Manual

FCC DECLARATION:

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area may cause interference to radio and television reception in which case the user will be required to correct the interference at their own expense.

CE DECLARATION:

EU Declaration of Conformity (DoC)		CE																																																												
																																																														
<p>We</p> <p>Company name: <input type="text" value="Magicard Ltd"/></p> <p>Postal address: <input type="text" value="Waverley House, Hampshire Road"/></p> <p>Postcode: <input type="text" value="DT4 9XD"/></p> <p>City: <input type="text" value="Weymouth"/></p> <p>Telephone number: <input type="text" value="+44 1305 470000"/></p> <p>E-Mail address: <input type="text" value="support@magicard.com"/></p>																																																														
																																																														
<p>declare that the DoC is issued under our sole responsibility and belongs to the following products:</p> <p>Product Names: <input type="text" value="Rio Pro 360, Magicard 300, Magicard 600, Pronto, Enduro, Ultima"/></p> <p>Product Description: <input type="text" value="Card Printer"/></p>																																																														
<p>Objects of the declaration (identification of apparatus allowing traceability):</p> <table border="1"> <tr> <td>3652-3001x-xx/x</td> <td>3300-0001x-xx/x</td> <td>3633-3001x-xx/x</td> <td>3680-0001x-xx/x</td> </tr> <tr> <td>3652-3002x-xx/x</td> <td>3300-0002x-xx/x</td> <td>3633-3002x-xx/x</td> <td>3680-0002x-xx/x</td> </tr> <tr> <td>3652-3005x-xx/x</td> <td>3300-0021x-xx/x</td> <td>3633-3021x-xx/x</td> <td>3680-0021x-xx/x</td> </tr> <tr> <td>3652-3008x-xx/x</td> <td>3300-0022x-xx/x</td> <td>3633-3022x-xx/x</td> <td>3680-0022x-xx/x</td> </tr> <tr> <td>3652-3009x-xx/x</td> <td></td> <td>3633-9001x-xx/x</td> <td></td> </tr> <tr> <td>3652-3011x-xx/x</td> <td>3652-5001x-xx/x</td> <td>3633-9002x-xx/x</td> <td></td> </tr> <tr> <td>3652-3012x-xx/x</td> <td>3652-5002x-xx/x</td> <td>3633-9021x-xx/x</td> <td></td> </tr> <tr> <td>3652-3013x-xx/x</td> <td>3652-5021x-xx/x</td> <td>3633-9022x-xx/x</td> <td></td> </tr> <tr> <td>3652-3021x-xx/x</td> <td>3652-5022x-xx/x</td> <td></td> <td></td> </tr> <tr> <td>3652-3022x-xx/x</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3652-3028x-xx/x</td> <td>3649-0001x-xx/x</td> <td></td> <td></td> </tr> <tr> <td>3652-3029x-xx/x</td> <td>3649-0002x-xx/x</td> <td></td> <td></td> </tr> <tr> <td>3652-3031x-xx/x</td> <td>3649-0004x-xx/x</td> <td></td> <td></td> </tr> <tr> <td>3652-3032x-xx/x</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3652-3033x-xx/x</td> <td></td> <td></td> <td></td> </tr> </table> <p style="text-align: center;"><i>Where x-xx/x refers to optional "white label" variants (cosmetic / branding differences only)</i></p>			3652-3001x-xx/x	3300-0001x-xx/x	3633-3001x-xx/x	3680-0001x-xx/x	3652-3002x-xx/x	3300-0002x-xx/x	3633-3002x-xx/x	3680-0002x-xx/x	3652-3005x-xx/x	3300-0021x-xx/x	3633-3021x-xx/x	3680-0021x-xx/x	3652-3008x-xx/x	3300-0022x-xx/x	3633-3022x-xx/x	3680-0022x-xx/x	3652-3009x-xx/x		3633-9001x-xx/x		3652-3011x-xx/x	3652-5001x-xx/x	3633-9002x-xx/x		3652-3012x-xx/x	3652-5002x-xx/x	3633-9021x-xx/x		3652-3013x-xx/x	3652-5021x-xx/x	3633-9022x-xx/x		3652-3021x-xx/x	3652-5022x-xx/x			3652-3022x-xx/x				3652-3028x-xx/x	3649-0001x-xx/x			3652-3029x-xx/x	3649-0002x-xx/x			3652-3031x-xx/x	3649-0004x-xx/x			3652-3032x-xx/x				3652-3033x-xx/x			
3652-3001x-xx/x	3300-0001x-xx/x	3633-3001x-xx/x	3680-0001x-xx/x																																																											
3652-3002x-xx/x	3300-0002x-xx/x	3633-3002x-xx/x	3680-0002x-xx/x																																																											
3652-3005x-xx/x	3300-0021x-xx/x	3633-3021x-xx/x	3680-0021x-xx/x																																																											
3652-3008x-xx/x	3300-0022x-xx/x	3633-3022x-xx/x	3680-0022x-xx/x																																																											
3652-3009x-xx/x		3633-9001x-xx/x																																																												
3652-3011x-xx/x	3652-5001x-xx/x	3633-9002x-xx/x																																																												
3652-3012x-xx/x	3652-5002x-xx/x	3633-9021x-xx/x																																																												
3652-3013x-xx/x	3652-5021x-xx/x	3633-9022x-xx/x																																																												
3652-3021x-xx/x	3652-5022x-xx/x																																																													
3652-3022x-xx/x																																																														
3652-3028x-xx/x	3649-0001x-xx/x																																																													
3652-3029x-xx/x	3649-0002x-xx/x																																																													
3652-3031x-xx/x	3649-0004x-xx/x																																																													
3652-3032x-xx/x																																																														
3652-3033x-xx/x																																																														
<p>The objects of the declaration described above are in conformity with the relevant Union harmonisation legislation:</p> <p><input type="text" value="Low Voltage Directive (LVD) 2014/35/EU"/></p> <p><input type="text" value="Electromagnetic Compatibility (EMC) Directive 2014/30/EU"/></p> <p><input type="text" value="Directive on the Restriction of the use of certain Hazardous Substances (RoHS) 2011/65/EU"/></p>																																																														
<p>The following harmonised standards and technical specifications have been applied:</p> <p>Title and Date of standard/specification:</p> <p><input type="text" value="EN 60950-1:2006 + A11:2009 + A12:2011 + A1:2010 + A2:2013"/></p> <p><input type="text" value="Information technology equipment – Safety - Part 1: General requirements"/></p> <p><input type="text" value="EN 55024:2010 Information technology equipment – Immunity characteristics"/></p> <p><input type="text" value="EN 55032:2012 Electromagnetic compatibility of multimedia equipment – Emission requirements"/></p> <p>...</p> <p>...</p> <p>...</p>																																																														
<p>Notified body (where applicable): <input type="text" value="not applicable"/></p> <p>4 digit notified body number: <input type="text" value="..."/></p> <p>Reference number of the certificate of notified body: <input type="text" value="n/a"/></p>																																																														
<p>Additional information:</p> <p><input type="text" value=""/></p>																																																														
<p>Signed for and on behalf of Magicard Ltd:</p> <table border="1"> <tr> <td><input type="text" value="Weymouth, United Kingdom"/></td> <td><input type="text" value="10/04/2019"/></td> <td><input type="text" value="Gordon Hague, Chief Technical Officer"/></td> </tr> <tr> <td>Place of issue</td> <td>Date of issue</td> <td>Name function, signature:</td> </tr> </table>			<input type="text" value="Weymouth, United Kingdom"/>	<input type="text" value="10/04/2019"/>	<input type="text" value="Gordon Hague, Chief Technical Officer"/>	Place of issue	Date of issue	Name function, signature:																																																						
<input type="text" value="Weymouth, United Kingdom"/>	<input type="text" value="10/04/2019"/>	<input type="text" value="Gordon Hague, Chief Technical Officer"/>																																																												
Place of issue	Date of issue	Name function, signature:																																																												